


LEDAN® Assortment




Cracks in Stone




Waterproof



Grouting




Reconstruction



Detachment in plaster

REQUIREMENTS

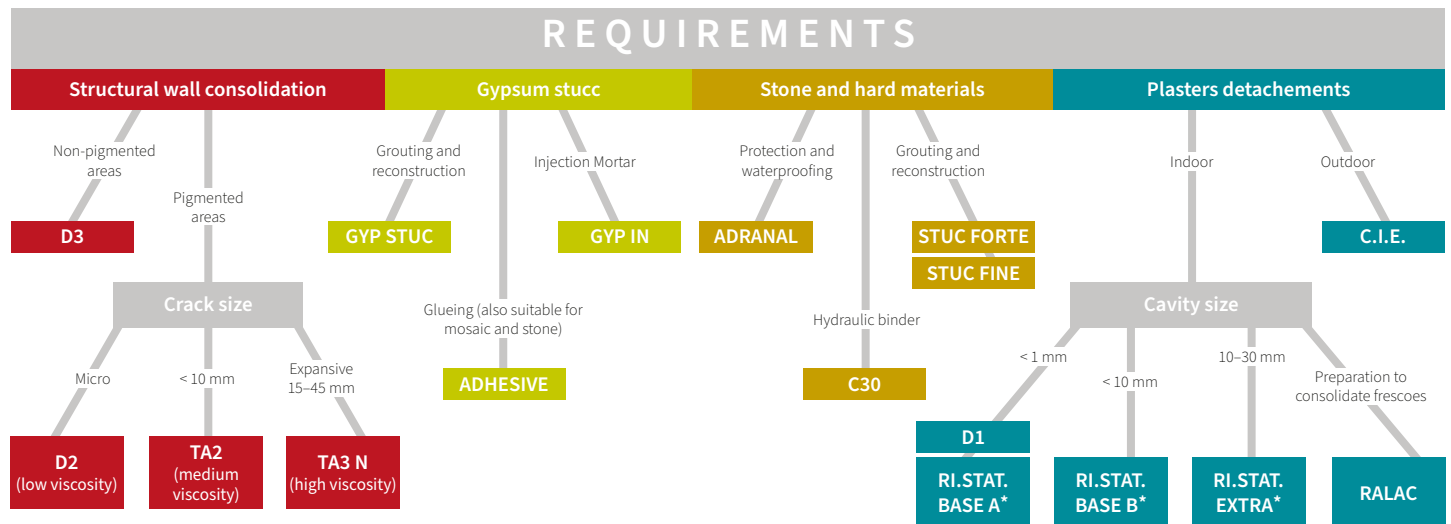

			For indoor and outdoor	For indoor	Pigmented areas	Non-pigmented areas	Expansive	Plasters detachments	Structural wall consolidation		Stone and hard materials		Gypsum stucc	
									Filling of cracks	Grouting of cracks	Water-proofing	Grouting, reconstruction, readhesion	Injection Mortar	Grouting, reconstruction readhesion
D1	Plasters detachments	Low viscosity		●	●			Low viscosity						
RI.STAT. BASE A*		Low viscosity		●	●			Low viscosity						
RI.STAT. BASE B*		< 10 mm		●	●			< 10 mm						
RI.STAT. EXTRA*		10–30 mm		●	●		●	10–30 mm						
RALAC			●	●			●							
C.I.E.			●			●								
D2	Structural wall consolidation	Micro	●		●			Micro						
D3		< 10 mm	●		●	●		< 10 mm						
TA2		15–45 mm	●		●		●	15–45 mm						
TA3 N			●		●		●							
STUC FORTE	Stone and hard materials		●		●				●		●			
C30			●		●				Hydraulic binder		Hydraulic binder			
STUC FINE										●	●			
ADRANAL			●		●				Protection	●				
ADHESIVE	Gypsum stucc	For fragments	●		●			For fragments				readhesion		readhesion
GYP IN		(If made of gypsum)		●	●			(If made of gypsum)					●	
GYP STUC		For closing voids		●	●			For closing voids						●

* These products can be mixed with each other.

