


Arched Window Awning UNO 95.2-R





Round-arched
window

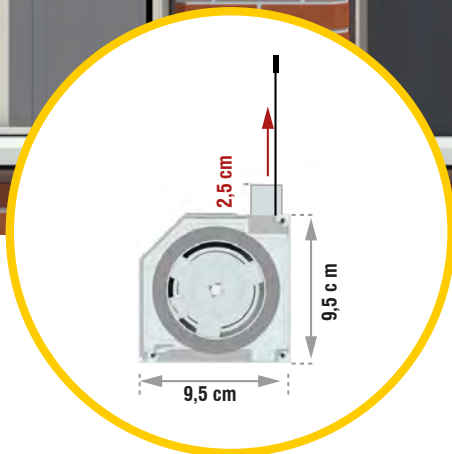

Basket-handle
arch window



Segmental arch
window




Shallow segmental
arch window

Arched Window Awning UNO 95.2-R

Size: S **M** L XL

Overview

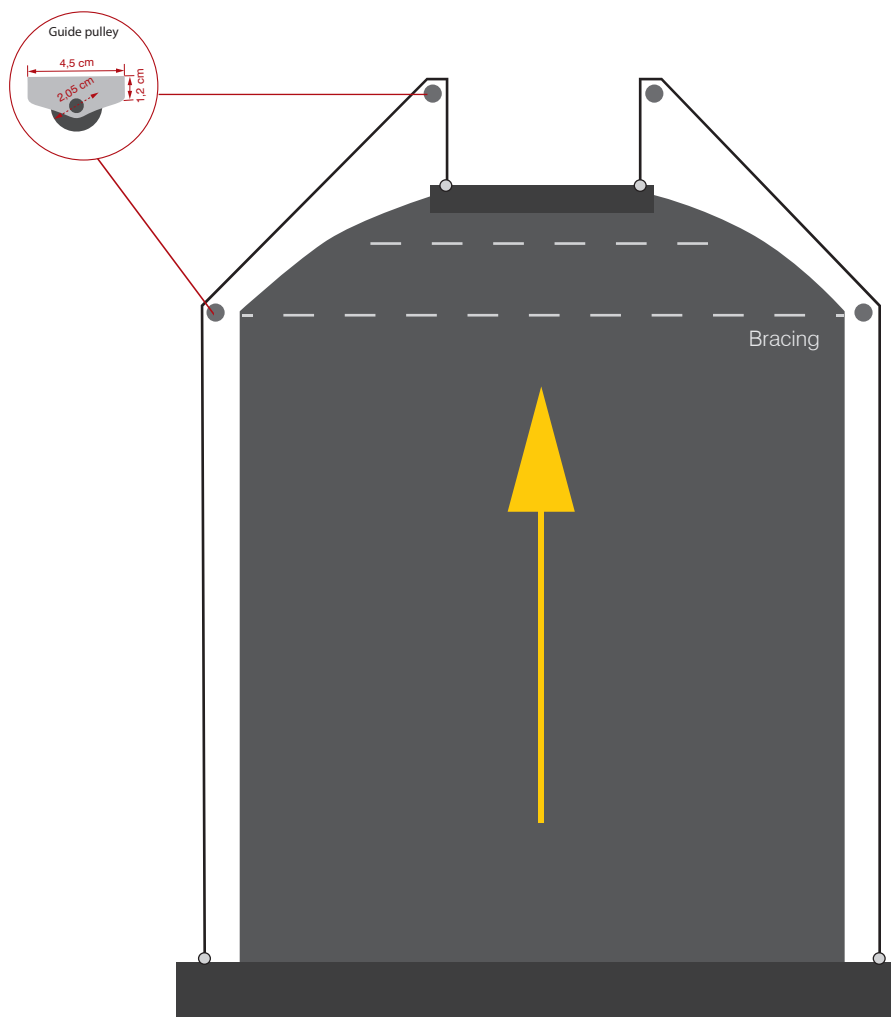

Overall width	89 cm bis 160 cm (alternative Typ XL up to 4 m wide)
Overall height	max. 280 cm (alternative Typ XL up to 6 m height)
Cassette	wide 95 mm x Höhe 95 mm
Profile color	white (RAL 9016); additional RAL colors available at an extra charge

Side guide Operation	High-strength guide cable 230 V motor (standard); optional (min. width 111 cm) radio, io-homecontrol
Fabrics	 Soltis 92  Soltis B92



Round-arched
window



Basket-handle
arch window




Segmental arch
window




Shallow segmental
arch window

Arched Window Awning UNO 95.2-R

Size:

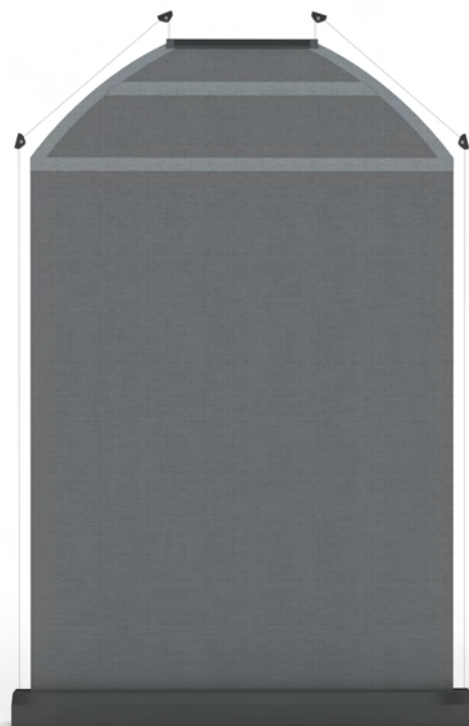


Arched window awning – fully extended

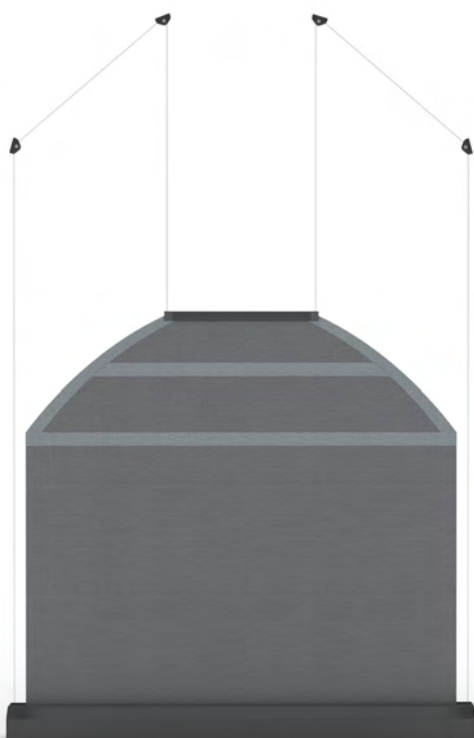

Arched window awning – partially extended



Arched window awning – fully retracted



Round-arched
window



Basket-handle
arch window



Segmental arch
window



Shallow segmental
arch window



GROUP
SOLARMATIC®
IHR SONDERBAU-EXPERTE

UNO 95.2-R Arched Window Awning

Special counter-tensioning system for indoor and outdoor applications

Product: SOLARMATIC® UNO 95.2-R Arched Window Awning



Cassette:

Two-part, fully enclosed aluminum cassette featuring a front access panel with a 45° bevel and a 95 x 95 mm cross-section; die-cast aluminum end caps—secured via side screws—incorporate guide rollers for the cable-pull mechanism. A decorative profile can be applied to the front panel for an additional charge.

Roller tube:

Precision galvanized steel tube with a special keder groove; diameter as required. Integrated tension spring for individual fabric re-tensioning.

Drive:

Special 230 V plug-in drive, 50 Hz, 140 W power output, IP44 protection class with thermal protection and integrated capacitor, noise emission level ≤ 70 dB (per EN ISO 12100-2:2003), EasyClick limit setting directly at the motor head for upper and lower limit positions.

Bottom rail:

One-piece aluminum bottom rail featuring special end caps and integrated pulleys for internal cable routing. When retracted, it protrudes just 25 mm from the headbox. **The bottom rail must span at least one-third of the system's width.**

Finish: Profiles powder-coated in RAL 9016

- RAL coating in all classic RAL shades available at an extra charge.

Plastic parts:

- End caps for the pull bar in black or grey

Recommended screen fabrics:

- [SOLTIS Perform 92](#) for translucency and glare protection
- [SOLTIS Opaque B92](#) for room darkening



Round-arched
window



Basket-handle
arch window



Segmental arch
window



Shallow segmental
arch window



GROUP
SOLARMATIC®
IHR SONDERBAU-EXPERTE




Round-arched window



Segmental arch window



Basket-handle arch window

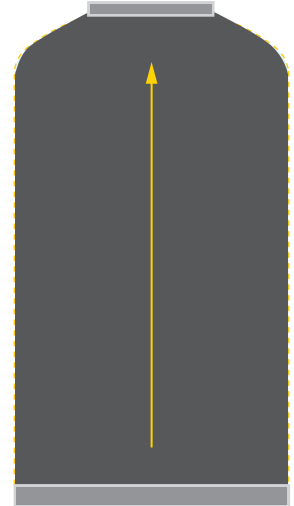

Shallow segmental arch window

Example: Window dimensions 1,200 × 2,330 mm






Round-arched
window

Basket-handle
arch window

Segmental arch
window

Shallow segmental
arch window


Example of a fully extended UNO 95.2-R arched window awning with a reveal depth of 115 mm and dimensions of 1,200 × 2,330 mm (W × H).

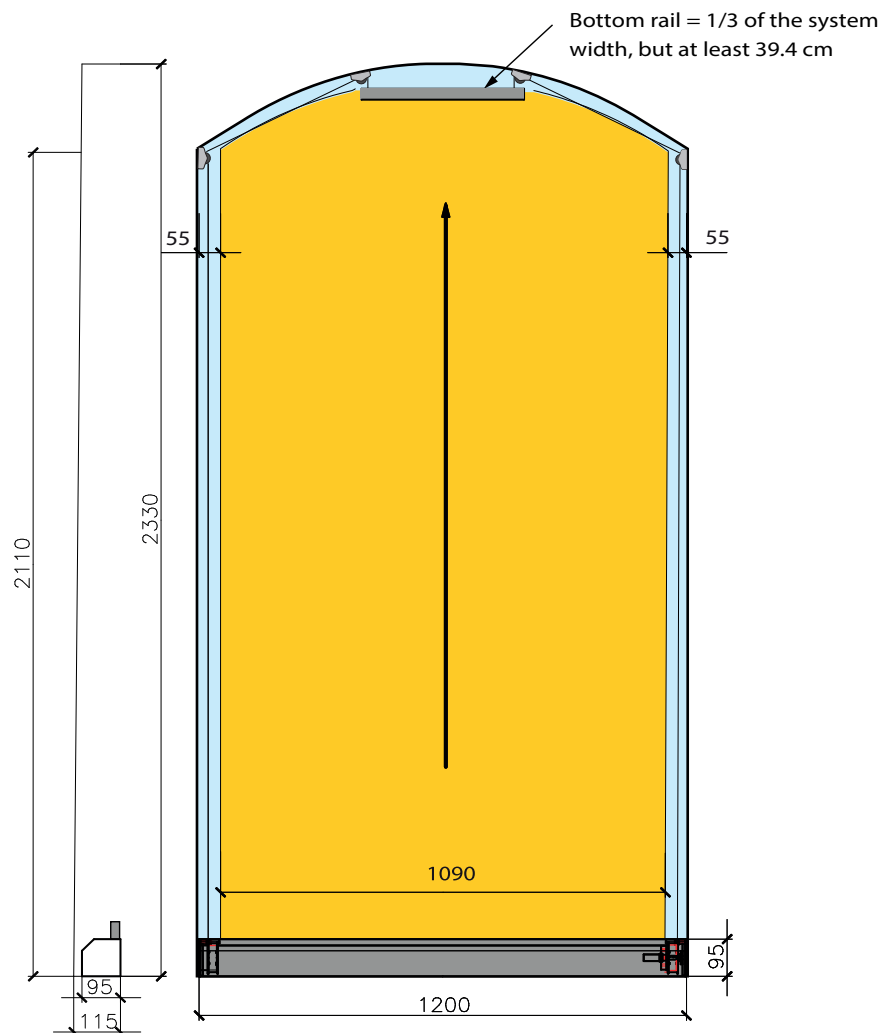

E.g. reveal depth 115 mm


Example: UNO 95.2-R for a segmental arch window

Example of a retracted UNO 95.2-R Arched window awning shown on a sample unit.

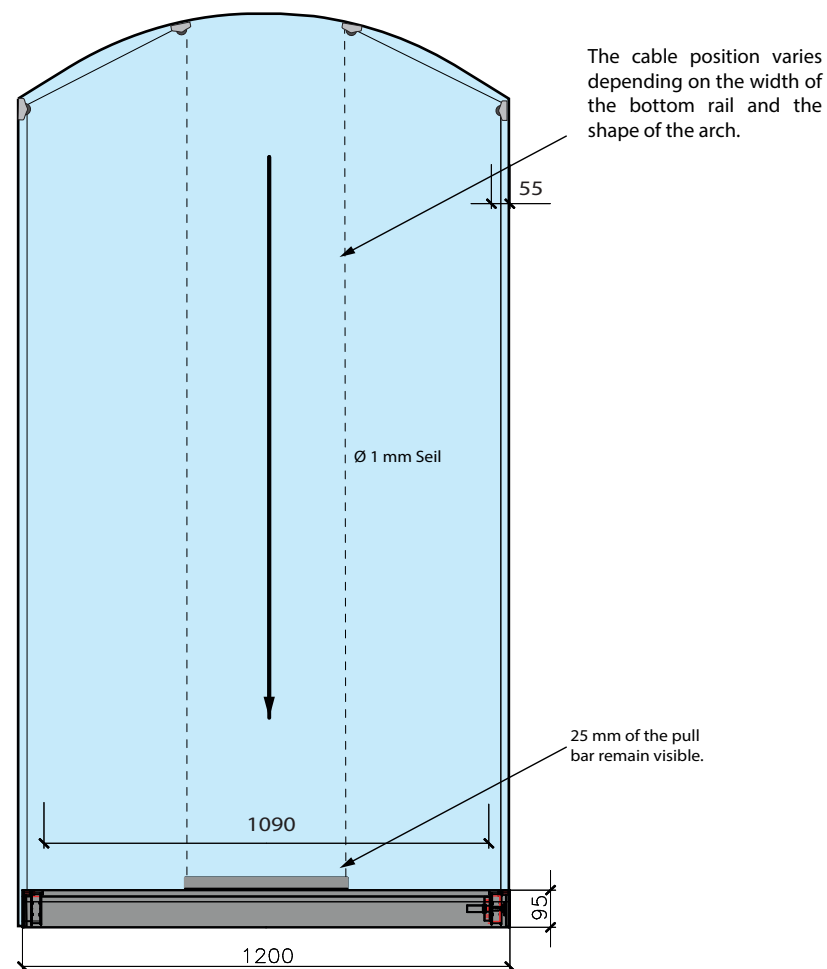



Round-arched
window



Basket-handle
arch window




Segmental arch
window




Shallow segmental
arch window

Example: Fully extended UNO 95.2 awning with a reveal depth of 115 mm and dimensions of 1,200 × 2,330 mm (W × H).

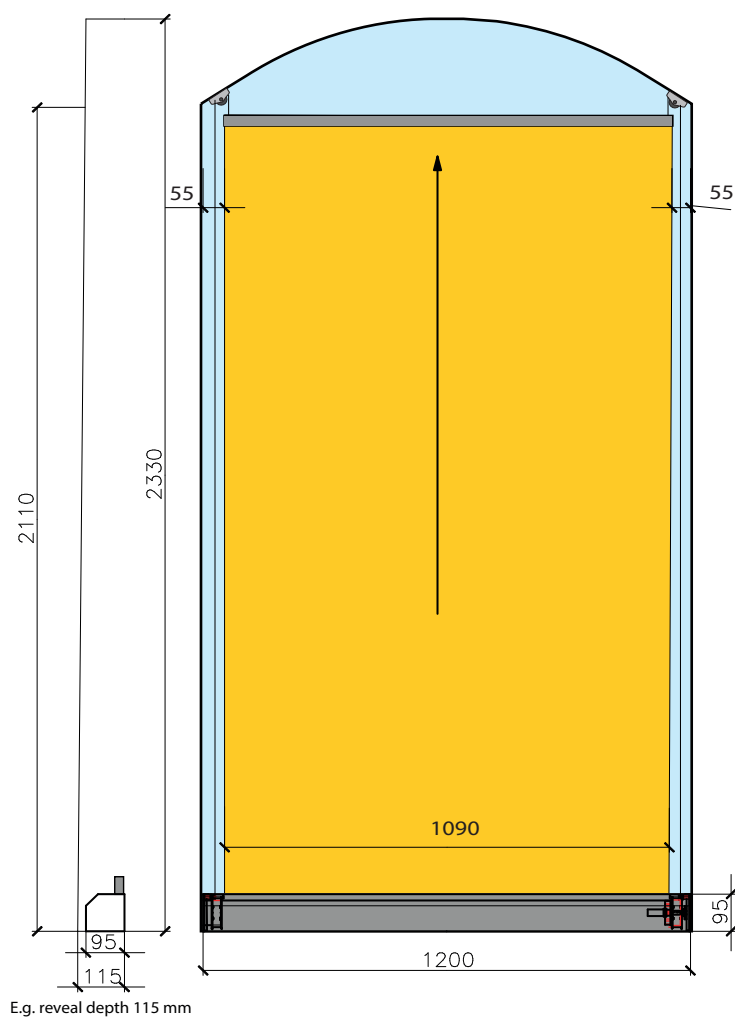

Example: Straight UNO 95.2 awning installed in a segmental arch window

Example of a retracted UNO 95.2 Arched window awning shown on a sample unit.

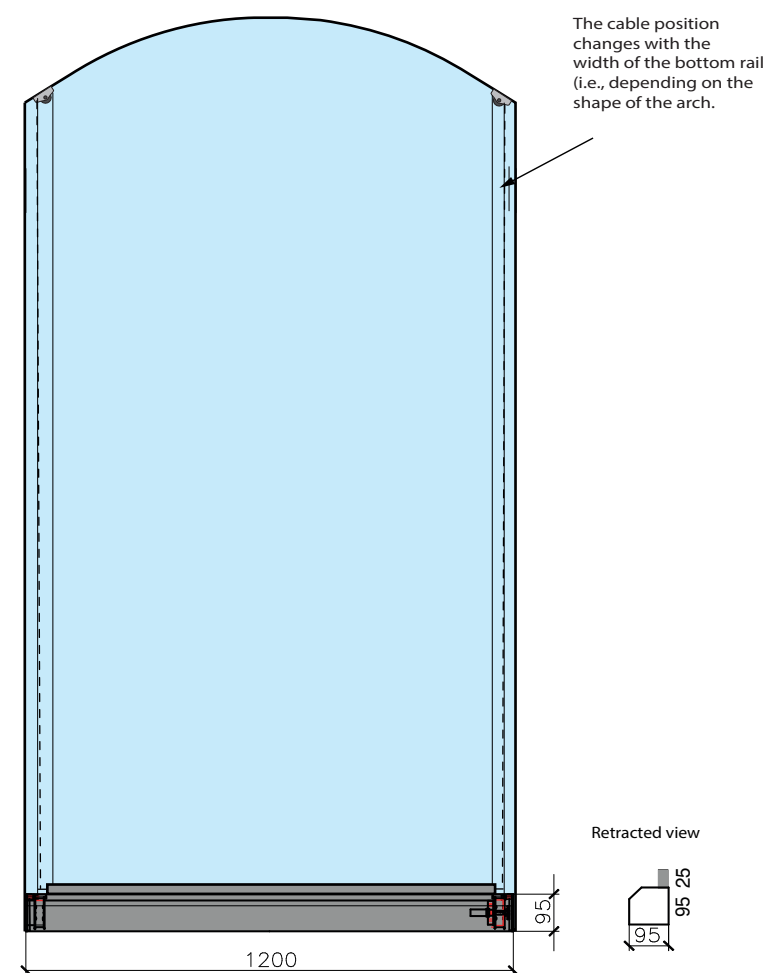



UNO 95.2


OVERVIEW

Application:	indoor / outdoor
Min. width	89 cm (radio-controlled: 111 cm / solar: 118 cm)
Max. width	200 cm (alternative XXL type up to 6 m width)
Max. height	310 cm (alternative XXL type up to 8 m height)
Cassette	95 x 95 mm
Profile colours	white (RAL 9016); other RAL colors available
Side guide	High-strength guide cable
Fabrics	<u>SOLTIS 92 / Soltis B92</u>

Operation




Solar-powered with handheld transmitter

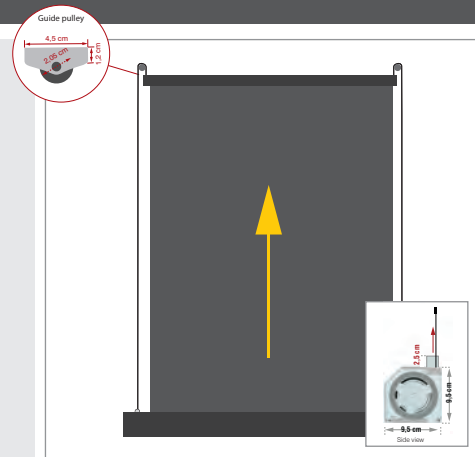


DETAILS


UNO 95.2

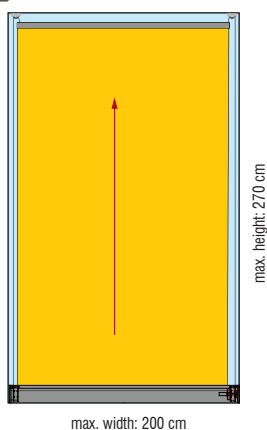


UNO 95.2-S (Slope)

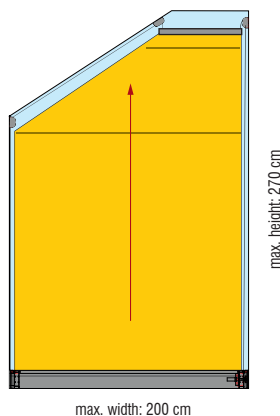

UNO 95.2-R (Arched version)

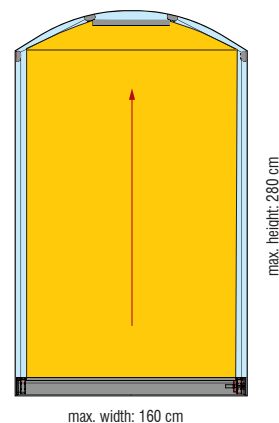

UNO 95.2
SOLTIS 92 - 2047



max. width: 300 cm
max. height: 270 cm
with side guide

